


PRODUCT SPECIFICATIONS

MODEL No.	DESCRIPTION:
7290CI	Flash-Bang Command Initiated
	Revision A 01/14

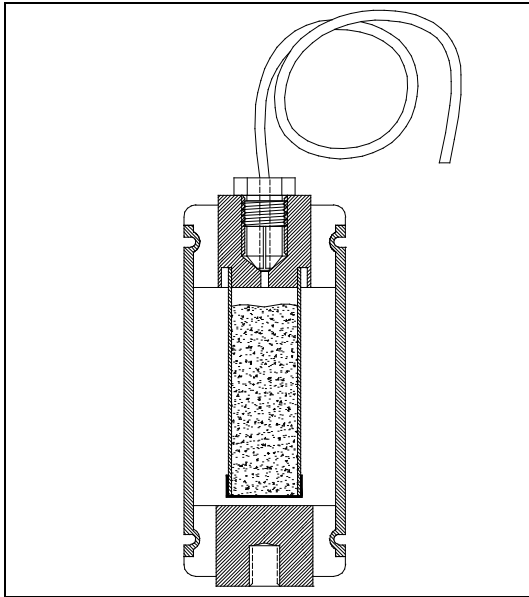

NOT TO SCALE

WARNING: CSI manufactures a variety of CTS less lethal products which are under pressure, pyrotechnic, incendiary, emit projectiles, generate smoke, or are explosive in nature. When used in accordance with CTS training guidelines and the individual agency's policy, they are intended to cause varying degrees of pain and injury, which are temporary. These products are restricted to law enforcement, corrections, and military personnel and are used to gain compliance, disperse crowds, restore order, or temporarily incapacitate dangerous persons. In rare circumstances, CTS less-lethal products may cause damage to property, serious bodily injury or death. Therefore, any person using the force option depicted on this page should receive proper training to ensure the safest and most effective use.

PHYSICAL & OPERATIONAL

Type	Noise-Flash Diversion Device
Material	Steel - Black Chromate
Diameter	2.0 (50.8 mm)
Length	5.10" (129.5 mm)
Weight	580 gm
Blast Ports	10 on top – 10 on bottom
Fuze Type	Model 201
Fuze Delay	Instantaneous
Sound Output	165-175 dB Average
Light Output	2 Million Candela Minimum
Reloadable	Single Use Only
Warranty	5 Years From Shipment Date

All specifications are average and are subject to change without notice.
All performance specifications are based on testing conducted in Jamestown, PA USA,
At an elevation of 1,058 feet above sea level at ambient temperature conditions.

SHIPPING INFORMATION

Proper Shipping Name	Grenade, Practice
UN Number	0452
Hazard Class	1.4G
Labels Required	Explosive 1.4G
Quantity Per Package	12
Total Package Weight	27lbs.
Package Type	4G Fiberboard Double Wall Box
Package Dimensions	13.0" x 9.5" x 8.75" Height
Net Explosive Weight	9 gm

CAUTION: Command Initiated Flash-Bangs are designed for specific tactical situations. One must be trained specifically in the basics of handling of explosive shock tube, firing devices.

Shock tube extends from the top of each device and should have a cap at the end of the tube. The tube is coated on the inside with Aluminized HMX and has a burn rate of approximately 6,500 fps (1981 Mps). The outer surface of the tube will remain intact during and after functioning.