


MODEL No.	DESCRIPTION:
2570	12GA Door Breacher
	Revision E 6/25

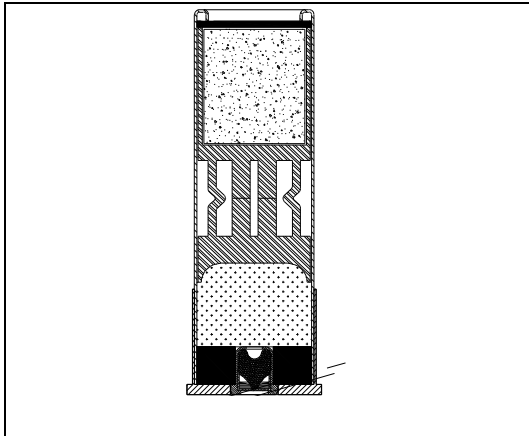

NOT TO SCALE

PHYSICAL & OPERATIONAL	
Type	Ballistic Breaching Round
Caliber	12 GA
Weapon Compatibility*	Cylinder Bore w/ Stand Off Device
Cartridge Length	2.45" (62.2 mm) +/-5%
Muzzle Velocity	1100+/- 40 ft/sec
Projectile Weight	19-21 gm
Projectile Material	Zinc
Warranty	5 Years from Shipment Date
<p>All specifications are average and are subject to change without notice. All performance specifications are based on testing conducted in Jamestown, PA USA, At an elevation of 1,058 feet above sea level at ambient temperature conditions.</p>	

**WARNING:** CSI manufactures a variety of CTS less lethal products which are under pressure, pyrotechnic, incendiary, emit projectiles, generate smoke, or are explosive in nature. When used in accordance with CTS training guidelines and the individual agency's policy, they are intended to cause varying degrees of pain and injury, which are temporary. These products are restricted to law enforcement, corrections, and military personnel and are used to gain compliance, disperse crowds, restore order, or temporarily incapacitate dangerous persons. In rare circumstances, if used incorrectly, CTS less-lethal products may cause damage to property, serious bodily injury or death. Therefore, any person using the force option depicted on this page should receive proper training to ensure the safest and most effective use.

SHIPPING INFORMATION	
Proper Shipping Name	Cartridges for Weapons, Inert Projectile
UN Number	0012
Hazard Class	1.4 S
Labels Required	Explosive 1.4S
Quantity Per Package	5 Cartridges Sealed Bag
Total Package Weight	34 lb. (400 Cartridges)
Package Type	Fiberboard Box
Package Dimensions	17x11x 6

\*Effectiveness is dependent on shot placement, length of the muzzle from the impact area, and the type of locking attachments. This breaching slug will be sufficient for most residential interior and exterior doors built to code. It may not be as effective on solid hard wood doors and metal fire, industrial type doors. Velocity tested with Oehler sky screens without baffle at 12ft.

**CAUTION:** Breaching rounds are designed for specific tactical situations. One must be trained specifically in the technique and tactics and exercise extreme care and caution to minimize the possibility of this projectile striking a human opposite the door.